




05-GG/GGG

DN 250-300

Trækfast • Tensile restant •
 Autobloquants •
 Auto-blocante • Zugfest •
 Strekkfast • Dragfast

ISO 2531
 BS 4772
 DIN 28600

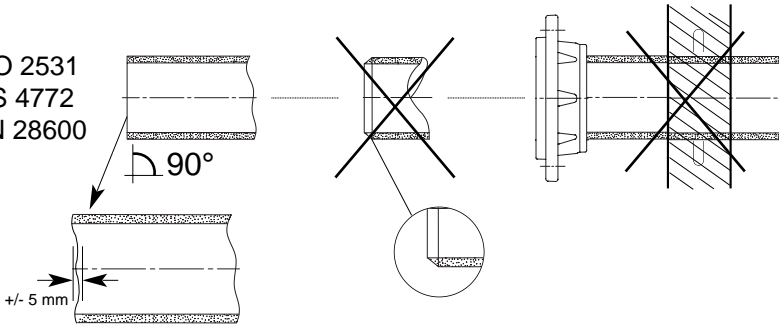


ISO 7005-2
 PN 10/16

GG / GGG
 DN / mm


PN
 DN / mm

$\alpha = 0^\circ$
 DN/mm: 50/65 → 100/118
 $\alpha = 3^\circ$
 DN/mm: 125/144 → 300/326



Glidemiddel / Gleitmittel / Grease
 Fett / Vet / Grasa / Graisse Alimentaire

DN/ext. dia	A	PN	Nm
250/274	50	10	150
250/274	50	16	200
300/326	50	10	150
300/326	50	16	200



GG / GGG

DN 250-300